


Product Data



Dimensions

Units in mm

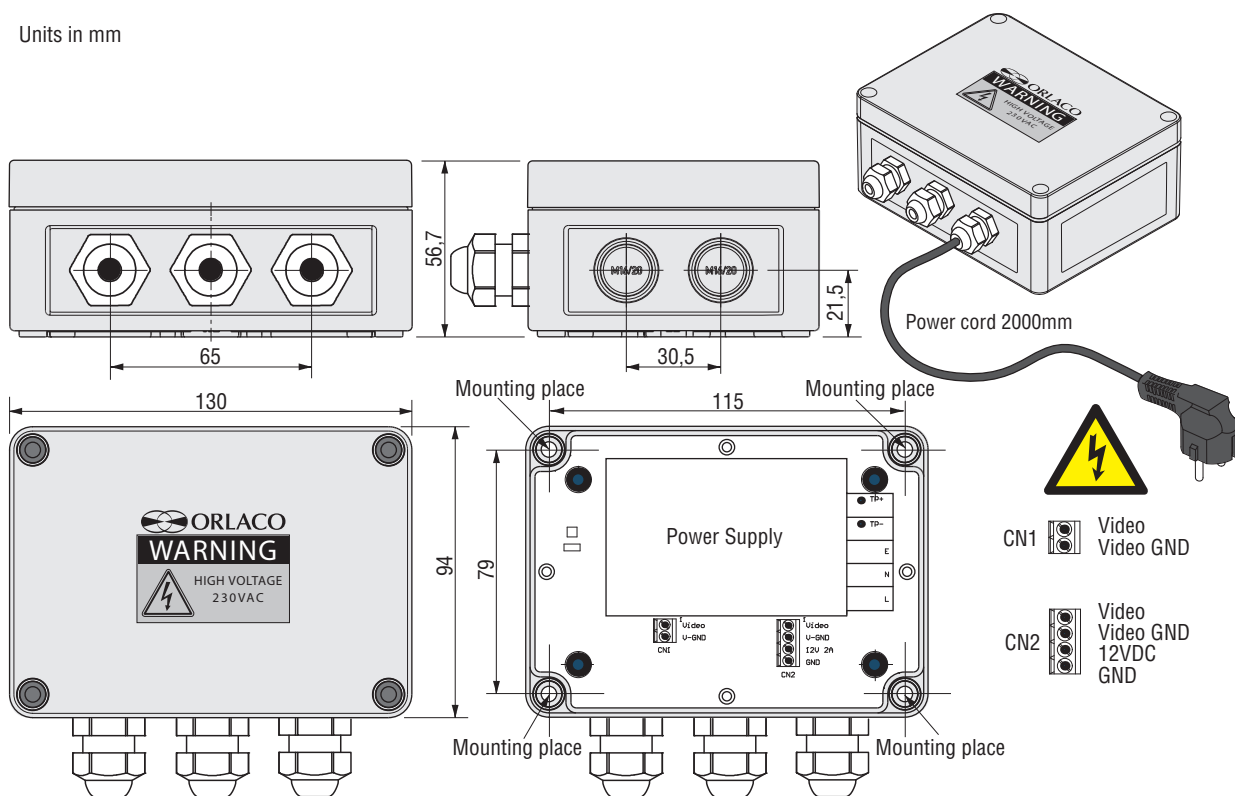

TECHNICAL DATA

AC/DC 110-230V/AC IN 12V 25W

	Description
Article number	311804
Input voltage	110 - 240VAC.
Input frequency	50/60Hz.
Output	12VDC.
Output current max.	2,1A.
Short current	6A, 10ms pulse 15Hz.
Hold-up time	23ms.
Line regulation	±0,5%.
Load regulation	±0,5%.
Ripple and noise	120mVp-p.
Safety	Test according EN60950-1, UL60950-1
EMI	EN55022, class B.
Operating temperature	-20°C to +50°C full load. max 70°C (60% load max.).
Protection	IP 66 according to EN 600529.
Weight	0,65 kg.
Construction	Base and cover: Polystyrene, grey, Sealing: Polyurethane, Screws: Polyamide/fiberglass.
Green Passport	All materials are compliant to Green Passport requirements according IMO resolution MEPC.197(62) as adopted on 15 July 2011 (Maritime sector: International Maritime Organization concerning the functions of the Marine Environment Protection Committee).
Installation Manual	For installation instructions see Installation Manual IM0973530.

All data subject to change without notice. All dimensions are for commercial purpose only.

The camera/display systems from Orlaco comply with the latest CE, ADR, EMC and mirror-directive regulations, where applicable.

All products are manufactured in accordance with the ISO 9001 quality management system, IATF 16949 quality automotive, ISO 14001 environmental management systems and all Ex products with the IECEx scheme and ATEX directives, where applicable.

