


Vision is  
our mission®

Adapter cable 0,2 monitor r4M M4  
Article no. 312020  
2018 • DS0960004 EN A 01

# Product Data



## Dimensions

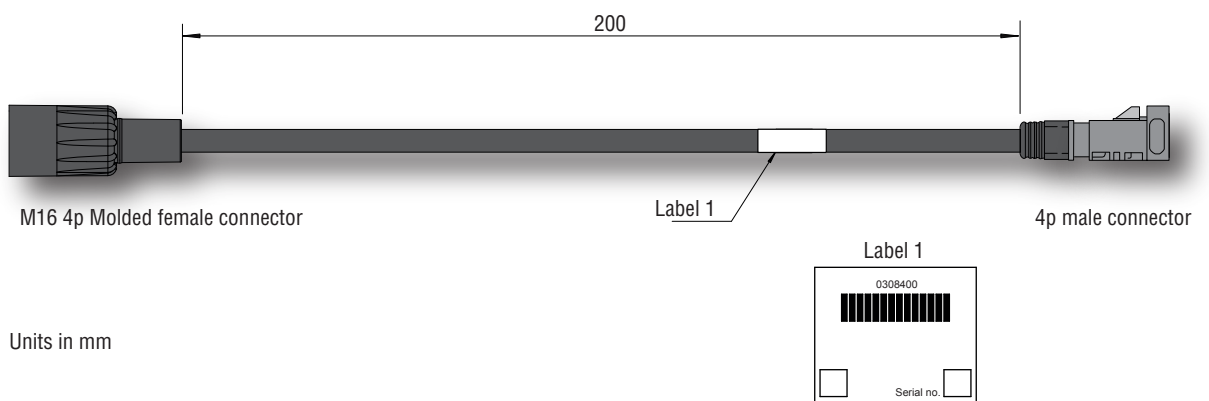


## TECHNICAL DATA

### Adapter cable 0,2 monitor r4M m4


	<b>Description</b>
<b>Article number</b>	<b>312020</b>
<b>Cable length</b>	200mm.
<b>Operating temperature</b>	-40°C...+85°C
<b>Connectors</b>	M16 4 pins molded female connector + 4 pins Rosenberger male connector Z-Coded.
<b>Cable</b>	4 x tinned stranded copper wires Cu ETP1, PVC sheath.
<b>Characteristic impedance</b>	90 +/-15 Ohm.
<b>Bending radius</b>	Single: min. 20mm, multiple (<10x): min 50mm.

#### Cable connections



M16 Female 4p  
molded connector  
Front View

2 = Blue = 24V/DC  
4 = Red = 0V  
1 = Green = Video  
3 = Black = Video shield  
Shielding connected to housing



Rosenberger  
Male connector  
Z-Coded  
Front View

1 = Blue = 24V/DC  
2 = Red = 0V  
3 = Green = Video  
4 = Black = Video shield  
Shielding connected to housing

All data subject to change without notice. All dimensions are for commercial purpose only.  
The camera/display systems from Orlaco comply with the latest CE, ADR, EMC and mirror-directive regulations, where applicable.  
All products are manufactured in accordance with the ISO 9001 quality management system, IATF 16949 quality automotive, ISO 14001 environmental management systems and all Ex products with the IECEx scheme and ATEX directives, where applicable.

